
IMPORTANT NOTE:

consult the cable supplier or manufacturer. and that the overall cable resistance is 10 Ohms or less per core at 100m of cable. If in doubt please If using CW1308, CW1128 or CW1128B cable before installing please ensure that is a twisted pair

Art.3351 Videophone

Please **DO NOT** use Copper Coated Steel (CCS) or Copper Clad Aluminium (CCA) cable

is recommended that the cable is installed by a competent and qualified electrician and/or security All cable information shown is for Videx products only and are the minimum cable requirements. It installation engineer. Videx is **NOT** responsible for the installation of insufficient or inferior cable.

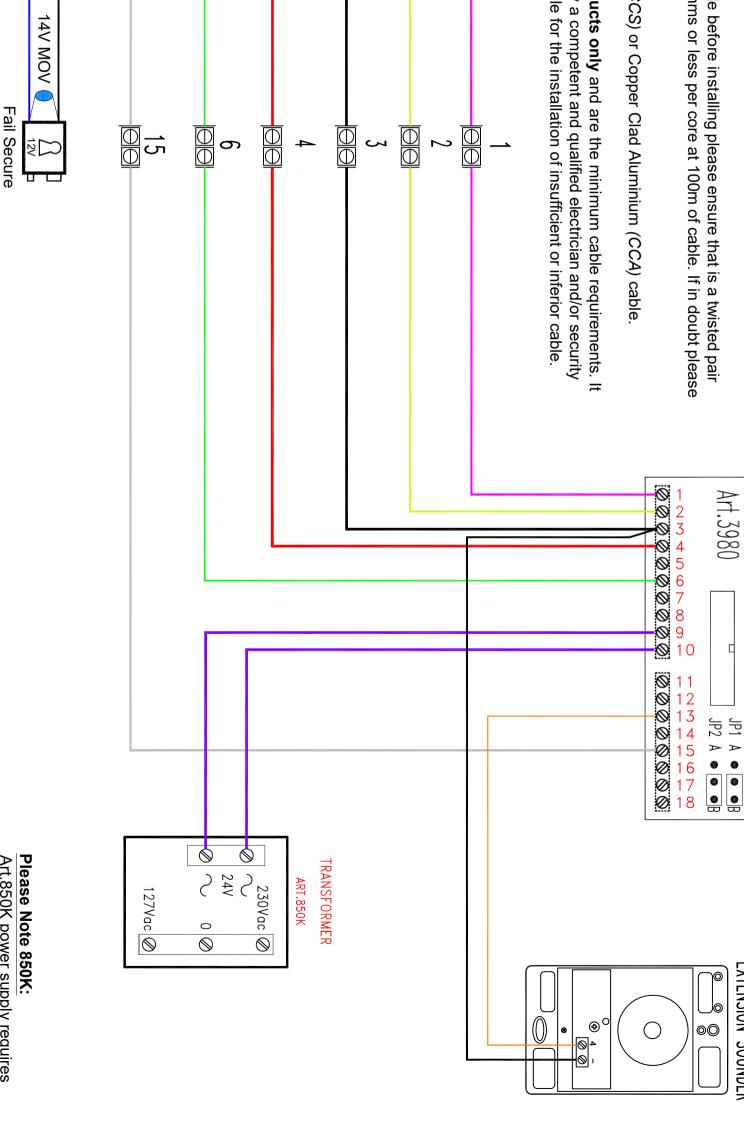

CONNECTION TO MAINS SAFETY & GUIDANCE NOTES:

CABLING NOTES:

IMPORTANT NOTE:

All cable types recommended are based on cabling information supplied by customer.

ı ⊗

ı ⊘ v⊘

 \sim \bigcirc

1 ⊗ 1 ⊗ 1 ≤ ⊗

CAMERA UNIT ART.831K

The system MUST be installed in accordance with the current I.E.E. regulations (in particular I.E.E. wining regulations BS7671) In particular Videx recommends:

If using CW1308, CW1128 or CW1128B cable before installing please ensure that is a twisted pair and that the overall cable resistance is 10 Ohms or less per core at 100m of cable. If in doubt please consult the cable supplier or manufacturer.

Please DO NOT use Copper Coated Steel (CCS) or Copper Clad Aluminium (CCA)

All cable information shown is for Videx **products only** and are the minimum cable requirements. It is recommended that the cable is installed by a competent and qualified electrician and/or security installation engineer. Videx is **NOT** responsible for the installation of insufficient or inferior cable.

DATE: 09-07-07

REF: V<mark>831K1D1B3351512A</mark>

VK6N WITH EXTENSION SOUNDER

- Connecting the power supplies through an all-pole circuit breaker which shall have a contact separation of at least 3mm in each pole and shall disconnect all poles simultaneously.

 That the all-pole circuit breaker shall be placed in such a way to allow for easy access and that the switch shall remain readily operable.

 Ensuring that the mains supply (voltage, frequency and phase) complies with the product rating label.

 Isolating the mains before carrying out any product installation and maintenance work on the

monitor wired on a 1mm² cable. be located within 20m of Art.3351 230v AC mains input and needs to Art.850K power supply requires

WVIDEX VIDEX SECURITY LTD TECHNICAL HELP: TEL: 0191 224 3174 FAX: 0191 224 4938 INITIAL: EMAIL: tech@videxuk.com